


# Strike

## LED Strike 1

Designer: Carlo Vietri  
Registered patent



## LED Strike 2

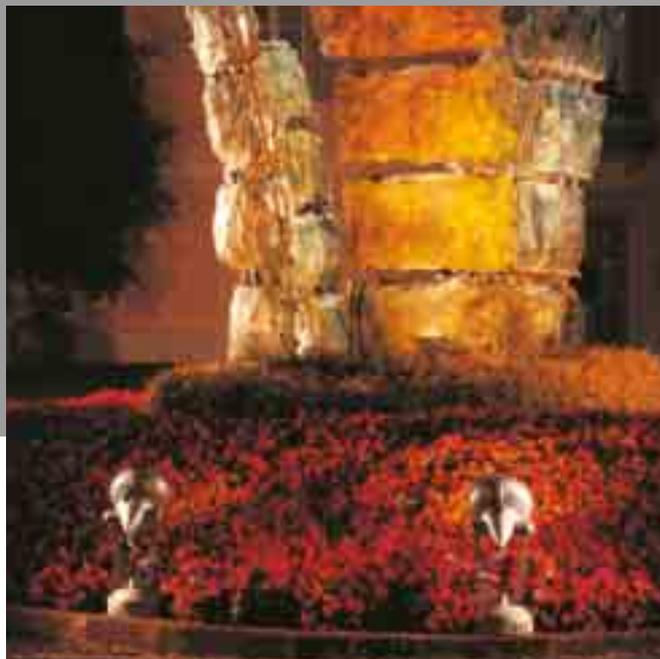


With the new lamp **Strike** every garden is transformed in a scenario where light is playing and creating a new and glamorous effect. A large range of accessories allows the installation of **Strike** in a variety of ways: on a wall, on the ground, on a spike, on an arm; it can be installed in gardens, shop windows and with a special self-blocking belt even on a tree. Dichroic filters create a captivating and emotive atmosphere. **Strike** is suitable to a wide range of lighting sources: low voltage dichroic, 230V halogen and 20-35-70-150W metal halide lamps. The luminous beam can be regulated to 10° - 18° - 38° - 90°. The LED light source, which has been developed exclusively for Goccia, will surprise you with its performance of 9,5W and a life of more than 50.000 hours. **Strike 2** can support a group of 3 high performance led for 29W and 3600 lumen. **Strike** is entirely made in aluminium and has a protection degree of IP66.




**goccia**  
ILLUMINAZIONE

# Strike: the garden becomes a stage.

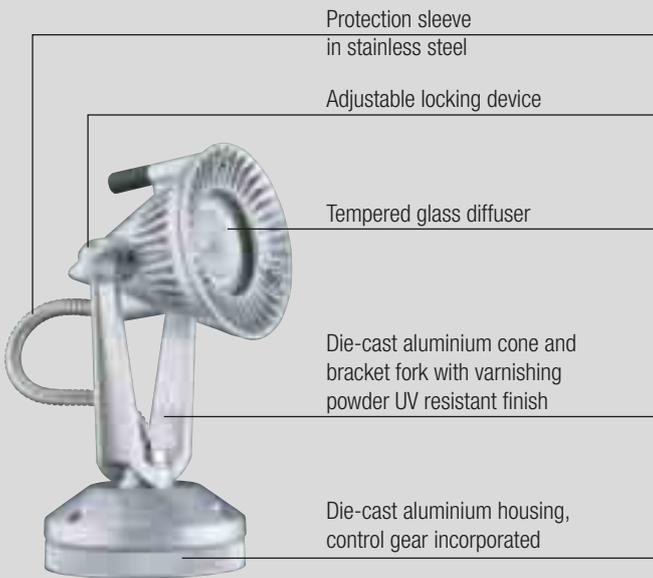


The arms are supplied already wired.



Strike offers a wide angle-beam selection: 10°, 18°, 38°, 90°.



A large range of accessories allows the installation in any position.

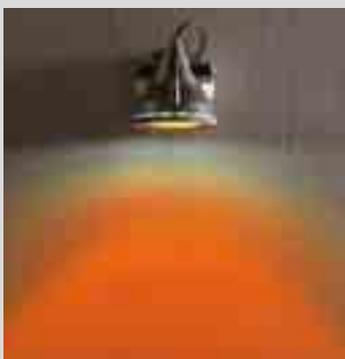

Available a full range of dichroic filters to colour the luminous beam.




LEDS with special lens incorporated. 9,5W - 1200 Lumen - 50.000 hours.



The optical cone can be oriented by 15 degrees.



- Housing, frame, bracket fork and base in die-cast aluminium
- Tempered glass diffuser
- Stainless steel screws
- Wiring incorporated
- Lamps excluded
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards




Colours


CODE NO.	Lamp	W	V	A	B	C	L
4601 *	Universal GY 6,35	50	12	110	110	109	225
	GU 5,3	50 dichroic	12				

GY 6,35 10° the standard - 38° on request  
 GU 5,3 dichroic lamp available on the market with 10°-24°-38°-60° angle beam

**220-250V supply with IP66 electronic transformer incorporated in the base.**

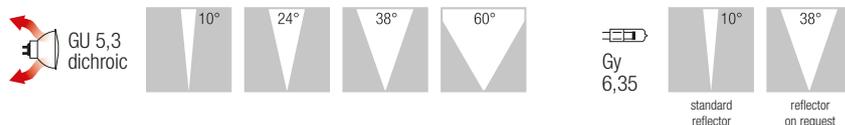


- Housing, frame, bracket fork and base in die-cast aluminium
- Tempered glass diffuser
- Stainless steel screws
- Wiring incorporated
- Lamps excluded
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards




Colours

CODE NO.	Lamp	W	V	A	B	C	L
4603 *	Universal GU 10	50	230	110	110	109	225


GU 10 halogen 25°-50°



Alternative lamps allowed




Max. dimensions





- Housing, frame, bracket fork and base in die-cast aluminium
- Tempered glass diffuser
- Stainless steel screws
- Wiring incorporated
- Lamps excluded
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards **CE**




Colours **SI**

CODE NO.		Lamp	W	A	B	C	L
4647 *	<input checked="" type="checkbox"/>	Metal halide GU 6,5	20	165	110	109	257
4602 *	<input checked="" type="checkbox"/>	Metal halide GU 6,5	35	165	110	109	257

GU 6,5 12° the standard - 40° on request


**Electronic ballast incorporated.**



Strike 1 Led



- Housing, frame, bracket fork and base in die-cast aluminium
- Tempered glass diffuser
- Stainless steel screws
- Wiring incorporated
- LED unit included
- 220-250V supply with electronic transformer incorporated in the base
- 9,5W - led - 1200 lumen / CRI 85
- Life: 50.000 h. with max decreasing of 30%
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards **CE**



Colours **SI**

CODE NO.		Lamp	W	Lumen	A	B	C	L
4604 *	<input checked="" type="checkbox"/>	Led	9,5	1200	110	110	109	225

**18° the standard - 38° on request. Light tonality: 4000K. Other tonality on request.**




## Strike 1 with arm

goccia  
ILLUMINAZIONE



- Housing, frame, bracket fork and base in die-cast aluminium. Arm in extruded aluminium.
- Wiring incorporated
- To be installed on wall or on the ground in gardens
- Lamps not included
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards **CE**

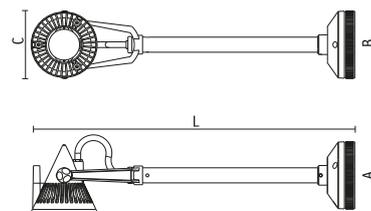


Colours **SI**

CODE NO.	Lamp	W	V	A	B	C	L
4605 *	Universal GY 6,35	50	12	110	110	109	527
	GU 5,3	50 dichroic	12				

GY 6,35 10° the standard - 38° on request

GU 5,3 dichroic lamp available on the market with 10°-24°-38°-60° angle beam

**220-250V supply with IP66 electronic transformer incorporated in the base.**



standard reflector reflector on request




CODE NO.	Lamp	W	V	A	B	C	L
4607 *	Universal GU 10	50	230	110	110	109	527

GU 10 halogen 25°-50°



GU 10


Alternative lamps allowed



GU 10 fluorescent

GU 10 led


Max. dimensions



CODE NO.	Lamp	W	A	B	C	L
4648 *	Metal halide GU 6,5	20	165	110	109	559
4606 *	Metal halide GU 6,5	35	165	110	109	559


GU 6,5 12° the standard - 40° on request

**Electronic ballast incorporated.**



standard reflector

reflector on request

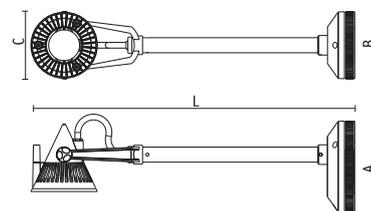

## Strike 1 Led with arm



Colours **SI**

CODE NO.	Lamp	W	Lumen	A	B	C	L
4608 *	Led	9,5	1200	110	110	109	527

**18° the standard - 38° on request. Light tonality: 4000K. Other tonality on request.**



LED + parabolic reflector



standard

on request


Energy class: go to code index

## Strike 1 with curved arm

goccia  
ILLUMINAZIONE



- Housing, frame, bracket fork and base in die-cast aluminium. Arm in extruded aluminium.
- Wiring incorporated
- To be installed on wall or on the ground in gardens
- Lamps not included
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards **CE**




Colours

CODE NO.	Lamp	W	V	A	B	C	L
4609 *	Universal GY 6,35 GU 5,3	50	12 50 dichroic	110	110	415	918

GY 6,35 10° the standard - 38° on request  
GU 5,3 dichroic lamp available on the market with 10°-24°-38°-60° angle beam

**220-250V supply with IP66 electronic transformer incorporated in the base.**



standard reflector reflector on request

CODE NO.	Lamp	W	V	A	B	C	L
4611 *	Universal GU 10	50	230	110	110	415	918


GU 10 halogen 25°-50°



GU 10



Alternative lamps allowed




GU 10 fluorescent



GU 10 led

Max. dimensions



CODE NO.	Lamp	W	A	B	C	L
4649 *	Metal halide GU 6,5	20	165	110	415	950
4610 *	Metal halide GU 6,5	35	165	110	415	950


GU 6,5 12° the standard - 40° on request

**Electronic ballast incorporated.**



standard reflector

reflector on request



## Strike 1 Led with curved arm

Colours



CODE NO.	Lamp	W	Lumen	A	B	C	L
4612 *	Led	9,5	1200	110	110	415	918

18° the standard - 38° on request. Light tonality: 4000K. Other tonality on request.

LED + parabolic reflector



standard

on request


Energy class: go to code index





**Shield**

- Entirely in die-cast aluminium
- Accessory to be installed afterwards at any time



Colours  SI


CODE NO.	Description	A	B	S
4051 *	Shield only (Strike fitting is supplied separately)	109	177	57



-  Red RO
-  Green VE
-  Yellow GI
-  Orange AR
-  Blue BL

**Dichroic filter**

- Pyrex glass and dichroic finish
- With frame in die-cast aluminium




CODE NO.	Description	A	B	S
4053 *	Filter only (Strike fitting is supplied separately)	109	125	12

Shield and filter can be installed together with special screws.



**Spike**

- Entirely in no corrosion tecnopolimer
- To be installed with codes 4601/4603/4604/4605/4607/4608/4609/4611/4612




CODE NO.	Description	H
4055	Spike only (Strike fitting is supplied separately)	350



**Plate**

- Stainless-steel plate with ground anchoring set
- To be installed with codes 4601/4603/4604/4605/4607/4608/4609/4611/4612




CODE NO.	Description	H
4057	Plate with anchoring set	200



**Strap**

- Strap for installation on branches, stumps, poles, columns
- With strap, bracket, gasket
- To be installed with codes 4601/4602/4603/4604
- Suitable for ø15 cm branches and stumps



CODE NO.	Description
4059	Strap only (Strike fitting is supplied separately)




## Strike 2

goccia  
ILLUMINAZIONE




- Housing, frame, bracket fork and base in die-cast aluminium
- Tempered glass diffuser
- Stainless steel screws
- Wiring incorporated
- Control gear incorporated in the base
- Adjustable angle beam by external device
- Lamps excluded
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards  $\text{C}\text{E}$



Colours **SI**


CODE NO.	Lamp	W	A	B	C	L
4613 *	<input type="checkbox"/> Metal halide G12	70	190	190	200	415

Angle beam: 10° the standard - 40° on request

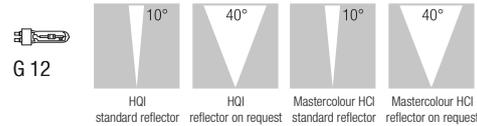

CODE NO.	Lamp	W	A	B	C	L
4618 *	<input type="checkbox"/> Metal halide G12	150	190	190	200	440


Angle beam: 10° the standard - 40° on request

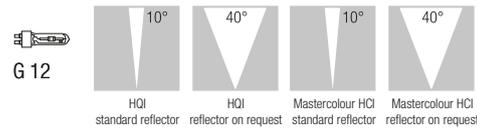

## Strike 2 Led




- Housing, frame, bracket fork and base in die-cast aluminium
- Tempered glass diffuser
- Stainless steel screws
- Driver 220-250V incorporated
- 3 Led - 500 mA - 3600 lumen
- CRI Color rendering 85
- Life: 50.000 h. with 30% max decreasing
- Class II IP 66
- Made according to EN 60598-1:08+A11:09 European standards  $\text{C}\text{E}$



Colours **SI**

CODE NO.	Lamp	W	Lumen	A	B	C	L
4614 *	<input type="checkbox"/> Led	29	3600	190	190	200	440

18° the standard. Other angle beam on request. Tonality 4000K. Other tonality on request.

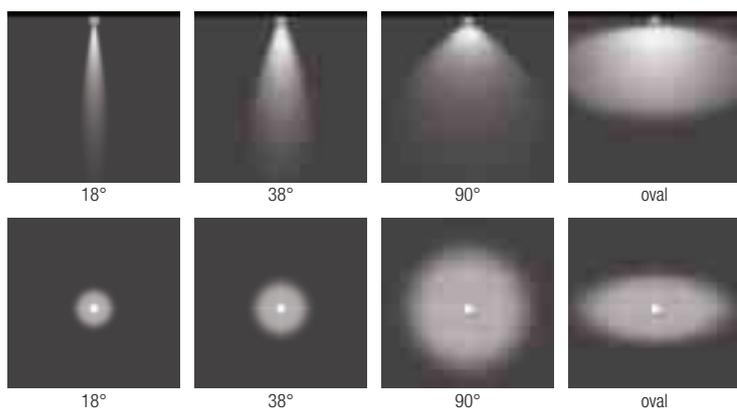


## Strike 2 with arm

goccia  
ILLUMINAZIONE




- Housing, frame, bracket fork and base in die-cast aluminium. Arm in extruded aluminium
- Wiring incorporated
- Control gear incorporated in the base
- To be installed on wall or on the ground in gardens
- Lamps excluded
- Class II for the whole range
- IP 66
- Made according to EN 60598-1:08+A11:09 European standards  $\text{CE}$

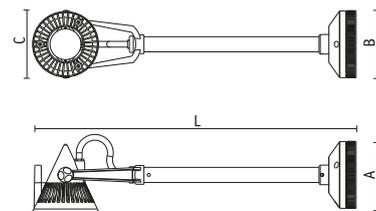

Colours **SI**


CODE NO.	Lamp	W	A	B	C	L
<b>4619 *</b>	Metal halide G12	70	190	190	200	940

Angle beam: 10° the standard - 40° on request

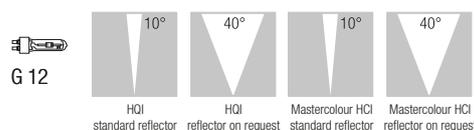

CODE NO.	Lamp	W	A	B	C	L
<b>4622 *</b>	Metal halide G12	150	190	190	200	985

Angle beam: 10° the standard - 40° on request

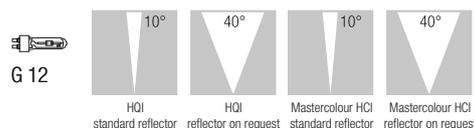

## Strike 2 Led with arm




- Housing, frame, bracket fork and base in die-cast aluminium
- Arm in extruded aluminium
- Stainless steel screws
- Driver 220-250V incorporated
- 3 Led - 500 mA - 3600 lumen
- CRI Color rendering 85
- Life: 50.000 h. with 30% max decreasing
- Class II IP 66
- Made according to EN 60598-1:08+A11:09 European standards  $\text{CE}$

Colours **SI**

CODE NO.	Lamp	W	Lumen	A	B	C	L
<b>4623 *</b>	Led	29	3600	190	190	200	985


18° the standard. Other angle beam on request. Tonality 4000K. Other tonality on request.

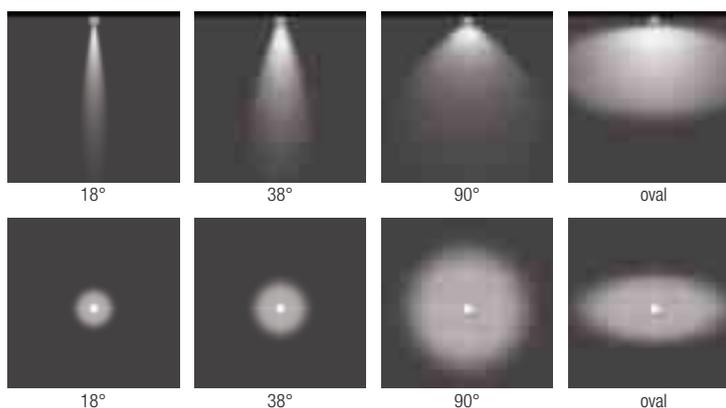



**Shield**

- Entirely in die-cast aluminium
- Accessory to be installed afterwards at any time



Colours S


CODE NO.	Description	A	B	S
4652 *	Shield only (Strike fitting is supplied separately)	200	320	115



- Red RO
- Green VE
- Yellow GI
- Orange AR
- Blue BL

**Dichroic filter**

- Pyrex glass and dichroic finish
- With frame in die-cast aluminium




CODE NO.	Description	A	B	S
4654 *	Filter only (Strike fitting is supplied separately)	200	230	25

Shield and filter can be installed together with special screws.



**Spike**

- In no corrosion tecnopolimer + steel bracket
- To be installed with codes 4613/4618/4614




CODE NO.	Description	H
4655	Spike only (Strike fitting is supplied separately)	350



**Plate**

- Stainless-steel plate with ground anchoring set
- To be installed with codes 4613/4618/4614/4619/4622/4623



CODE NO.	Description	H
4656	Plate with anchoring set	200

GIOIELLERIA



OTTICA

